


ECO-CITYLOCK® 5X10 80MM

PRODUCT NUMBER # 315

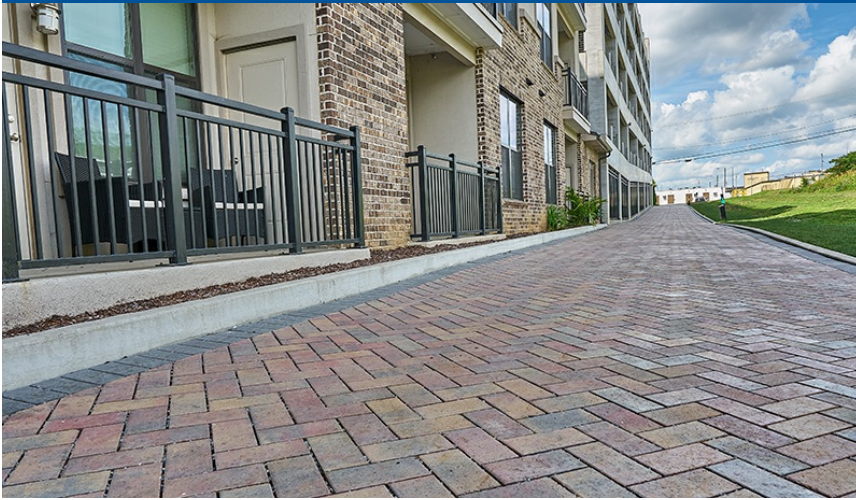

- Smooth surfaces and finely chamfered edges combine to create a sleek and contemporary look
- Versatile 2:1 shape easily forms stacked, runner, basketweave, and herringbone patterns
- Heavy vehicular applications
- Initial infiltration rate exceeds 700 in/hour per ASTM C1781.
- Made of durable concrete with iron oxide pigments which helps prevent fading from extended UV exposure. Meets or exceeds applicable requirements of ASTM C936 and C1782.


The CityLock series of standard and permeable pavers includes a wide range of shapes to suit most site pavement conditions. All CityLock units share a common joint design which increases design versatility while also helping installation patterns maintain their bond lines. Each unit features fine chamfers which create a contemporary aesthetic and smooth rolling surface. Sleek and innovative, CityLock units are ideal for architectural purposed applications.

STONE(S)



		5x10
Height	<i>in</i>	3.15
	<i>mm</i>	80
Length	<i>in</i>	10
	<i>mm</i>	254
Width	<i>in</i>	5
	<i>mm</i>	127
Units	<i>/pl</i>	280

PALLET LAYOUT

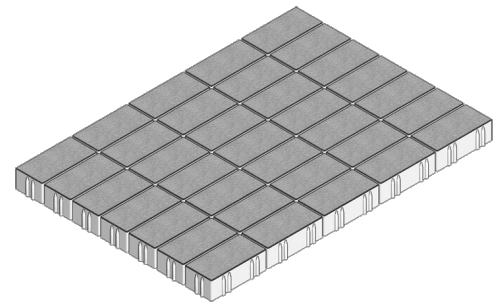

NOTES

Weights are approximate and do not include shipping pallet.

PALLET SPECS

Pallet Weight	3612 lbs
Sq Ft/Pallet	97 sq.ft.