

ECO-PANORAMA™ DEMI 80MM


PRODUCT NUMBER # 366



- Riven stone surfaces and softened edges create the natural look of weathered flagstone
- Designed to be installed in an efficient repeating runner or ashlar pattern, with equal numbers of 1/2, square, and 3/2 stones
- Medium vehicular applications
- Initial infiltration rate exceeds 700 in/hour per ASTM C1781.
- Made of durable concrete with iron oxide pigments which helps prevent fading from extended UV exposure. Meets or exceeds applicable requirements of ASTM C936 and C1782.


Our extensive portfolio of permeable pavers mitigates stormwater flow rates and improves water quality without the need for additional drainage systems. Proven through many years of successful projects, enlarged lugs on the sidewalls of these units create quarter-inch joints which, when filled with a properly-sized aggregate, drain water to the permeable base. This action filters stormwater, reduces peak flow rates, and recharges groundwater sources to create a sustainable pavement option.

STONE(S)



		4x8	8x8	8x12
Height	<i>in</i>	3.15	3.15	3.15
	<i>mm</i>	80	80	80
Length	<i>in</i>	4	8	12
	<i>mm</i>	101.6	203.2	304.8
Width	<i>in</i>	8	8	8
	<i>mm</i>	203.2	203.2	203.2
Units	<i>/pl</i>	64	64	64

PALLET LAYOUT

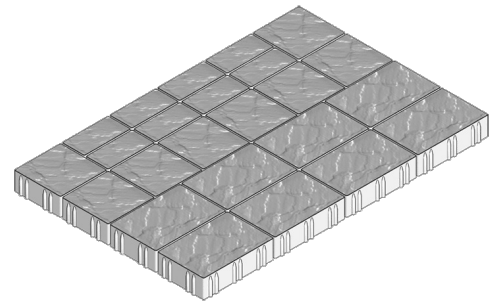

NOTES

Weights are approximate and do not include shipping pallet.

PALLET SPECS

Pallet Weight	3074 lbs
Sq Ft/Pallet	86 sq.ft.