

TS-A3000C

DATA SPECIFICATION SHEET



CATEGORY: HARDSCAPE

COLORS: ●

PRODUCT OVERVIEW

Color Changing Cap / Wall Hardscape Light - A3000C

Our professional-grade A3000C Replaceable LED low voltage hardscape step and wall lights are an aluminum fixture with an aluminum mounting bracket. Our Hardscape light features a LED color-changing REPLACEABLE light bar to highlight steps, walls, and outdoor kitchens. Our hardscape light is available in a black or bronze finish.



Check Out All Our Hardscape Lights!
Scan to Visit Our Website!


SPECIFICATIONS

- Construction: Powder Coated Aluminum
- Finishes: Black Powder Coating.
- Lead Wire: 70" (Standard) 18AWG, SPT-1W Black Waterproof Wire.
- Light Source: Replaceable LED Module, 2700K - 6500K RGBCW BT control, .8W, 18 Lumen.
- Beam Angle: 120
- Power Factor: 0.63
- Recommended Lamp Rating: 1W
- Operating Voltage: 12V AC/DC
- Dimensions: 3.5" x 3.0" x 0.8"
- Powered By: Low Voltage Transformer (Sold Separately)
- IP65 Rated

FEATURES & BENEFITS

- Aluminum Construction
- Powder Coated Finishes – Protects fixture from wear and corrosion.
- APP Controlled – Free APP Download Via Apple Appstore & GooglePlay Store.
- Control Lighting from Mobile Device or Tablet via Tru-Scapes Color Control APP
- Low profile light fixture that illuminates downward – Fits into areas that other light won't fit.
- Replaceable LED Module
- Low energy consumption – Low Voltage LED Design.
- Lifespan of 30,000 Hours
- Comes with (2) Silicone Filled Wire Connectors – Rated for direct burial and outdoor use.

PRODUCT DIMENSIONS

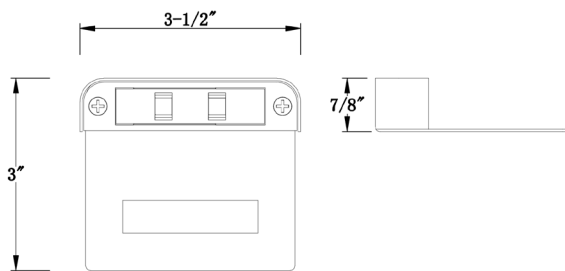

WARRANTY

- Tru-Scapes Lighting Sockets have a Lifetime Warranty.
- Light fixtures of brass, copper or stainless steel, aluminum, including finishes are warranted for five (5) years.
- LED Bulbs are warranted for five (5) years or 30,000 hours, whichever comes first.
- Stainless Steel, Painted and Weatherproof (plastic housing) transformers, excluding timers and photo cells, are warranted for five (5) years for the original purchaser.
- Tru-Scapes warranties do not cover plants that die or burn because of continuous light shined on them. This is not a defect, but the inherent nature of such plants. Certain acid loving plants such as arborvitae, pine trees, and others must not be exposed to light of any kind for more than 18 hours a day as these plants need time to sleep and allow photosynthesis to naturally occur.
- Low voltage landscape lighting fixture housings made of brass do naturally patina in color which is not a defect. (Please see www.Tru-Scapes.com for cleaning instructions.)
- See our full Warranty details at www.Tru-Scapes.com/faq.

CERTIFICATIONS



Indicates the product meets safety standards tested by Intertek.



Ensures the product is dust-tight and highly water-resistant.

CONTACT US

© Copyright 2024,
Tru-Scapes ® Registered Trademark•
Bucks County, PA • All Rights Reserved•
contacts@tru-scapes.com
1-800-878-1240

WWW.TRU-SCAPES.COM