

PRODUCT SPECIFICATIONS




Low Voltage Landscape Lighting Path Light - B302 Series

Product Description

The B306 LED Path Light is constructed from a heavy duty solid brass fixture, a heavy duty die-cast brass hat, an extra thick solid brass 21-3/4" stem, and a heavy duty ground stake. The fixture is also built with a beryllium copper socket with G4 LED bulb and Polycarbonate Shield. This fixture is a perfect addition to highlight your walkways, pathways, and outdoor living themed areas, with the 360 degree light output. The B306 lights are available in Antique Brushed Bronze or Powder Coated Black finishes. The replacement of the G4 LED Bulb is super easy and will only take a couple minutes to replace with a screwdriver.



Product Dimension

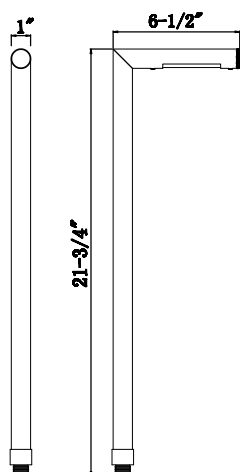

Specifications

- Construction: Heavy Duty Solid Brass
- Finish: Antique Brushed Bronze and Black Powder-Coated Finishes.
- Lead Wire: 36" (Standard) 18AWG, SPT-1W black waterproof wire.
- Mounting: 8" Heavy Duty Stake with cut out for wire exit
- Glass or Lens: Frosted Polycarbonate Protective Shield.
- Light Source (included): G4 2.5W 2700K LED Bulb.
- Maximum Lamp Rating: 20W
- Recommended Lamp Rating: 20W
- Operating Voltage: 12V AC
- Shipping Weight: 2.73 lbs
- Powered By: Low Voltage Transformer (Sold Separately)

Features & Benefits

- Heavy Duty Solid Brass Construction with a clear protective glass enclosure.
- Powder Coated Finish – Protects fixture from wear and corrosion.
- Beryllium Copper Socket – More corrosion resistant than copper.
- Water Tight Gasket Ring – Keeps water from entering housing.
- Heat Resistant Protective Glass Enclosure.
- Easy LED Bulb Replacement.
- 360 Degree Light Beam Spread.

Warranty

- Tru-Scapes Lighting Sockets have a Lifetime Warranty.
- Light fixtures of brass, copper or stainless steel, including finishes are warranted for five (5) years.
- LED Bulbs are warranted for five (5) years or 30,000 hours, whichever comes first.
- Stainless Steel, Painted and Weatherproof (plastic housing) transformers, excluding timers and photo cells, are warranted for five (5) years for the original purchaser.
- Tru-Scapes warranties do not cover plants that die or burn because of continuous light shined on them. This is not a defect, but the inherent nature of such plants. Certain acid-loving plants such as arborvitae, pine trees, and others must not be exposed to light of any kind for more than 18 hours a day as these plants need time to sleep and allow photosynthesis to naturally occur.

Certifications

